

RLN8-410

8CH PoE NVR with 2TB HDD for 24/7 Continuous Video Recording with Reolink Cameras

- 2TB HDD 8-Channel NVR
- Support up to 16MP
- Local & Remote Access

Specifications

Hardware	
Hardware	N7MB01
Video/Audio Input	
IP Video Input	PoE IP Camera x 8
Audio Input	Cameras with built-in mic
Video/Audio Output	
HDMI Output Resolution	3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768
VGA Output Resolution	1920x1080, 1280x1024, 1280x720, 1024x768
Audio Output	1-Channel, RCA
Decoding	
Video Format	H.264, H.265
Live View/Playback Resolution	7680x2160, 4608x1728, 4512x2512, 4096x3072, 3840x2160, 2560x2560, 2560x1920, 2560x1440, 2048x1536, 2304x1296, 1080p, 720p


Synchronous Playback	Up to 4 channels
HDD	
SATA	1 x SATA interface (1 x 2TB HDD included)
External HDD	1 eSATA Interface for HDD
Capacity	Up to 12TB (max. 6TB capacity for each HDD)
External Interface	
USB Interface	2 x USB 2.0
Network Interface	<ul style="list-style-type: none"> · 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/WAN · 8, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
PoE	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3af/at
Network	
Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browsers Supported	Edge, Firefox, Chrome, Safari
OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	
Power Supply	DC 48V~53V
Power Consumption	<10W (Without HDD&PoE)
Working Environment	Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90%
Dimensions	260 x 41 x 230mm

Weight	1.4kg
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .

Gallery & Specs



1. USB Port
2. Power LED/HDD LED
3. Control Panel

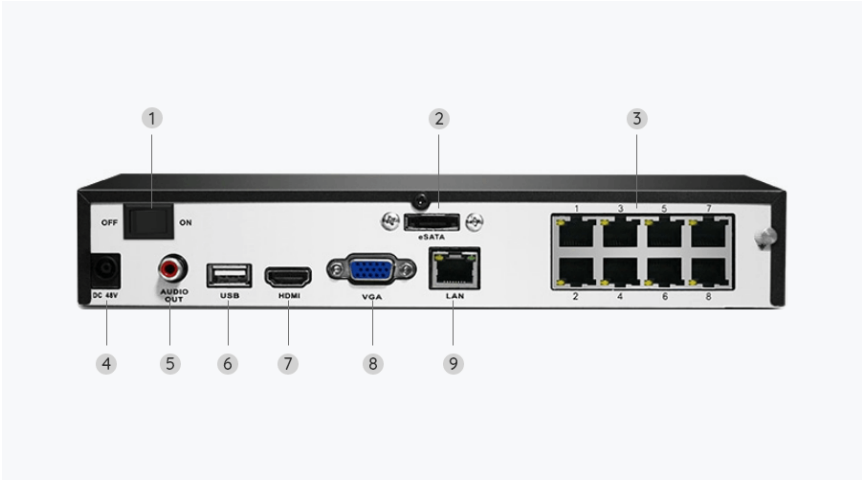

1. On/Off Switch
2. eSATA
3. RJ45
4. Power Input
5. Audio Out
6. USB Port
7. HDMI Port
8. VGA Port
9. Network